

# NEUTRAL BARS

Aluminum Or Copper AWG 4-14 to 300kcmil-6  
Stock sizes and made to order



**UL** **SF**  
600 VAC

## Available Screw Types



### Type 1

Headless  
Set Screw-  
Slotted-  
Steel-Zinc Pl.



### Type 2

Headed  
Mach. Scr.  
Slotted-  
Steel-Zinc Pl.



### Type 3

Headed Mach.  
Scr. Comb. Slot  
& Sq. Soc.-  
Steel-Zinc Pl.




### Type 4

Headless Set  
Screw-Hex.  
Soc.-Alum.-  
Tin Plated



**Multiple Connectors**  
Used in neutral bar  
assemblies and  
grounding applications

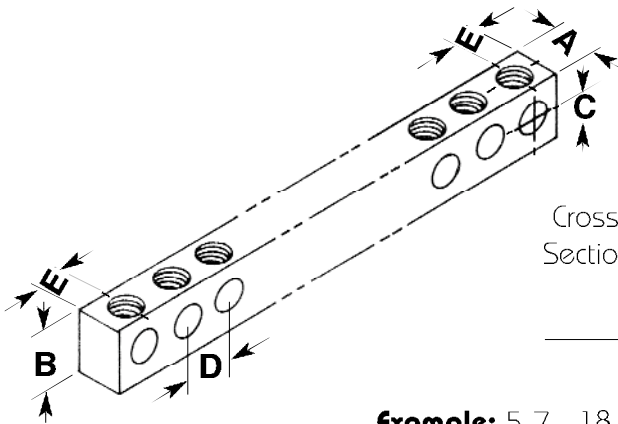

## Ordering Information:

To order specify the following:

Cross Section    No. of Circuits    Wire Size    Mat'l    Screw Type    Mounting Hole Pos.

\_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_

**Example:** 5-7 - 18 - 4-14 - A-1 - 2 - 9-16

**Note:** For mounting holes which fall outside the center-lines of wire holes consult factory.

\*Number of Circuits

CROSS SECTION	UL CSA	WIRE RANGE	A	B	C	D	E	MATERIAL A=ALUM. C=COPPER	SCREW TYPE
5 - 7	CU9AL	4-14	5/16	7/16	3/16	.312	3/16	A or C	1
5 - 7	CU7AL	4-14	5/16	7/16	3/16	.312	3/16	A or C	2 or 3
5 - 7	CU9AL	4-14	5/16	7/16	3/16	.350	3/16	A or C	1
5 - 7	CU7AL	4-14	5/16	7/16	3/16	.350	3/16	A or C	2 or 3
5 - 8	CU9AL	4-14	5/16	1/2	3/16	.312	3/16	A or C	1
5 - 8	CU7AL	4-14	5/16	1/2	3/16	.312	3/16	A or C	2 or 3
5 - 8	CU9AL	4-14	5/16	1/2	3/16	.350	3/16	A or C	1
5 - 8	CU7AL	4-14	5/16	1/2	3/16	.350	3/16	A or C	2 or 3
6 - 8	CU7AL	2-14	3/8	1/2	1/4	.397	1/4	C	1
6 - 10	CU7AL	2-14	3/8	5/8	17/64	.397	1/4	A	1
9 - 12	CU7AL	2/0-14	9/16	3/4	5/16	.601	1/2	A or C	1
16 - 16	CU7AL	300 MCM-6	1	1	7/16	1.0	29/64	A or C	4