



MARK #14969rev.1

NOTES;  
1) PARTS MARKED:  
350 KCMIL - 6  
CU9AL  
2S350

UL LOGO  
CSA LOGO  
IHI LOGO

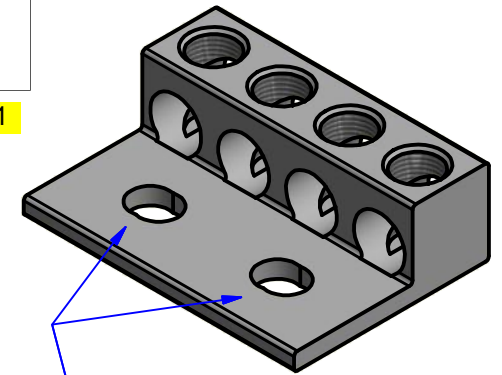

DOUBLE MARK PERMITTED

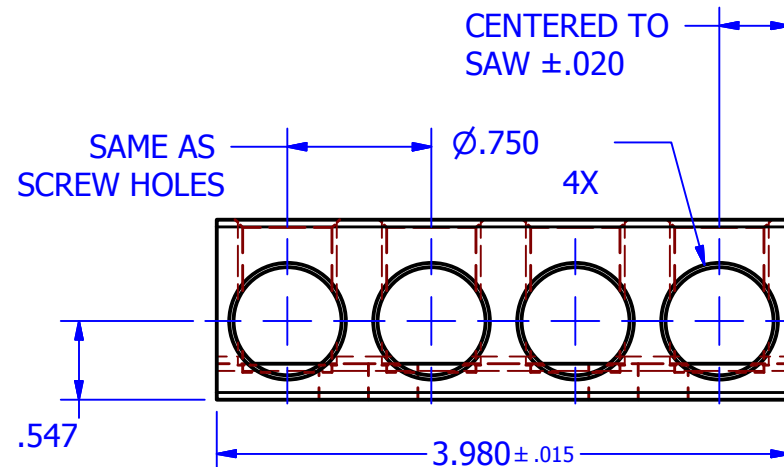

1. USE 2 x 1/2" (12mm) BOLTS AT 1-3/4" OR 2.0" SPACING
2. ZMVV CATEGORY RATED FOR GROUNDING, POWER DISTRIBUTION, POWER COLLECTION OR PARELLING IN PAIRS OF WIRES (1 PAIR or 2 PAIRS)
3. UL & CSA CATALOG NO: "2S350"

NOT FOR USE WHERE FAILURE CREATES A HAZARD TO HUMAN HEALTH OR SAFETY. ALL PRODUCTS ARE SUBJECT TO THIS FULL DISCLAIMER: <http://www.ihconnectors.com/disclaimer.html>

FOR FURTHER INFORMATION ON THE PROPER USE OF THIS PRODUCT IN SPECIFIC APPLICATIONS SEE <http://www.ihconnectors.com/GuideToFlexFlexibleFineStrandedWireCableMechanicalLugsFAQ.html>

<http://www.ihconnectors.com/Technical-Data-Installation.htm>

THIS DRAWING AND DESIGN ARE THE PROPERTY OF INTERNATIONAL HYDRAULICS, INC., CLEVELAND, OHIO, AND MAY NOT BE DUPLICATED, USED FOR THE BASIS OF DESIGN OR MANUFACTURE WITHOUT THE WRITTEN PERMISSION OF INTERNATIONAL HYDRAULICS, INC., CLEVELAND, OHIO.

UNLESS OTHERWISE SPECIFIED:  
1. DIMENSIONS ARE IN INCHES  
2. REMOVE ALL BURRS AND SHARP EDGES  
3. TOLERANCE ON DIMENSIONS:  
+/- .015

INTERNATIONAL HYDRAULICS, INC.

TITLE:

4S350-56-88 -SALES

4 HOLE, 6AWG-350KCMIL

MATERIAL:  
AL. EXTRUSION -  
X1020

SIZE:  
A

DRAWN BY:  
DJH

DWG NO.:

REV:  
1

FINISH:  
TIN ON AL.; EMS

DATE:  
6/12/2015

THIS IS A CAD DRAWING, DO NOT MANUALLY REVISE

Last Saved:2015/06/17 12:23