




SCALE=X2

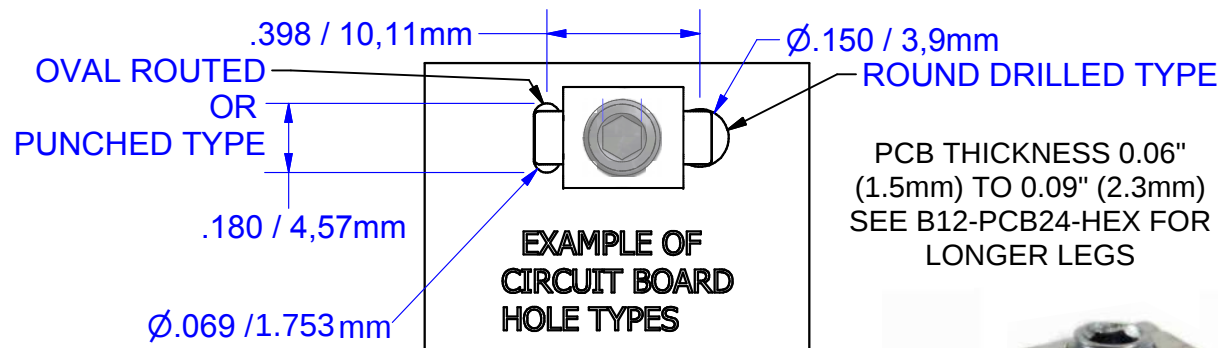


MAY HAVE VARIED ID
INDENT MARKS ON TOP



B12-NM



15715HEX
STEEL (ZINC PLATED)




10-32 UNF - 2A




PARTS MARKED


IHI
B12
cURus
CU7

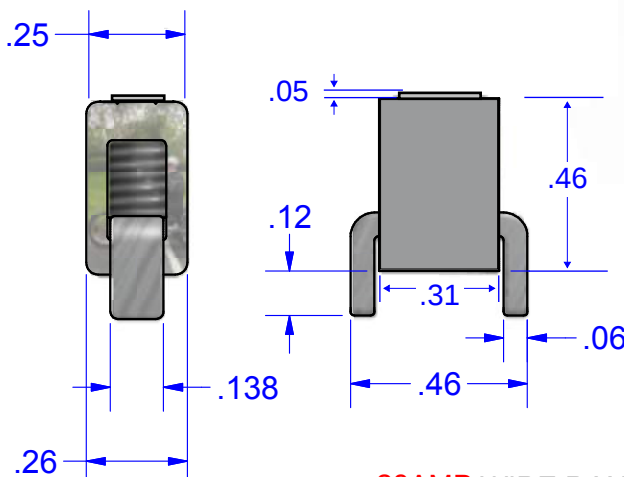


30AMP WIRE RANGE AWG
10-14 SOLID AND STRANDED



14307

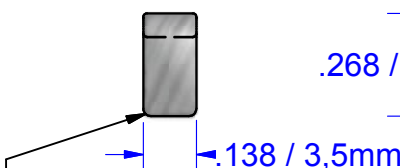

ROUNDED FOR
PCB ENTRY

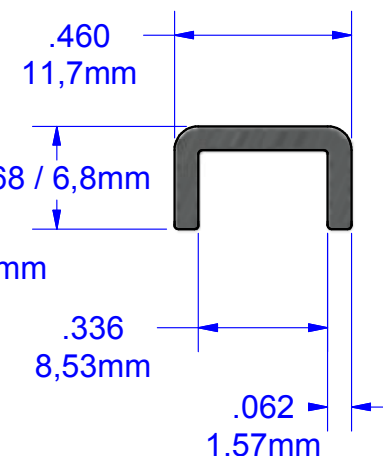

NOTES

1. FERRULES ARE RECOMMENDED FOR FINE AND STRANDED SMALL WIRES. FOR FLEX WIRE RATINGS WITH FERRULES SEE: ihiconnectors.com/Technical-Data-Installation.htm#FERRULE
2. WAVE SOLDERABLE (THT)
3. FOR .06 PCB MIN. BOARD THICKNESS.
4. ALL FINAL PCB SPECS BASED ON BUYER TESTING AND APPROVAL

COPYRIGHT (PER LATEST REVISION DATE) OF INTERNATIONAL HYDRAULICS, INC. (IHI®). ALL RIGHTS RESERVED. THIS COMPLETE ENGINEERING DRAWING, SCHEMATICS, AND DESIGN ARE PROPRIETARY AND CONFIDENTIAL PROPERTY OF INTERNATIONAL HYDRAULICS, INC. DBA: IHI CONNECTORS® IN CLEVELAND, OHIO, AND MAY NOT BE DUPLICATED, USED FOR THE BASIS OF DESIGN OR MANUFACTURE WITHOUT PRIOR WRITTEN PERMISSION OF ITS OWNER. Contents contain a combination of registered trademark, copyright, or patent protections exclusively owned by IHI® which are not to be infringed upon.

Not for use where failure creates a hazard to human health or safety. All products are subject to this full disclaimer: ihiconnectors.com/disclaimer.html

FOR FURTHER INFORMATION ON THE PROPER USE OF THIS PRODUCT IN SPECIFIC APPLICATIONS SEE ihiconnectors.com/b12.htm

THIS DRAWING AND DESIGN ARE THE PROPERTY OF INTERNATIONAL HYDRAULICS, INC., CLEVELAND, OHIO, AND MAY NOT BE DUPLICATED, USED FOR THE BASIS OF DESIGN OR MANUFACTURE WITHOUT THE WRITTEN PERMISSION OF INTERNATIONAL HYDRAULICS, INC., CLEVELAND, OHIO.		INTERNATIONAL HYDRAULICS, INC.			
GENERAL TOLERANCES ±.015 (±0,038)		TITLE: B12-PCB-HEX 30AMP PCB CONNECTOR (THT)			
MATERIAL: 6006/6105 XB12		SIZE: X2	DRAWN BY: TDS	DWG NO.: B12-PCB-HEX	REV:
FINISH: TIN PLATE FOR SOLDERING		DATE: 05/15/2025		IHI CONNECTORS	