


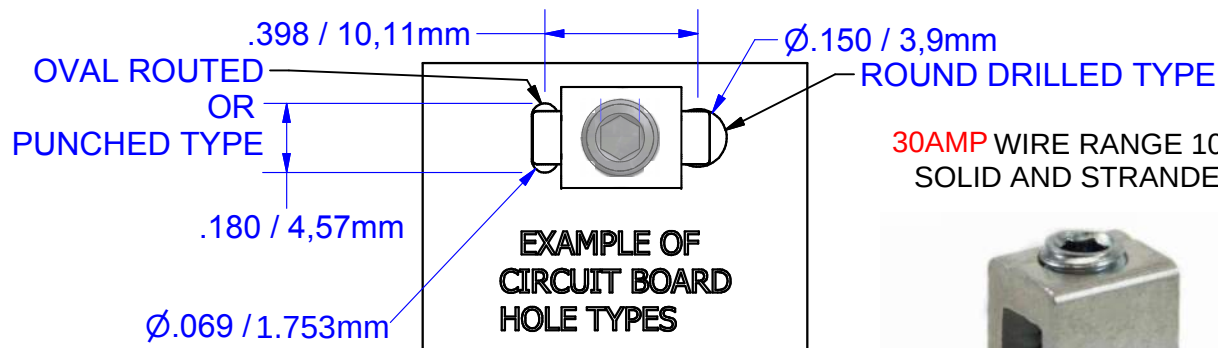
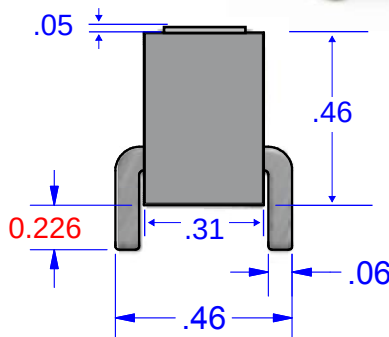
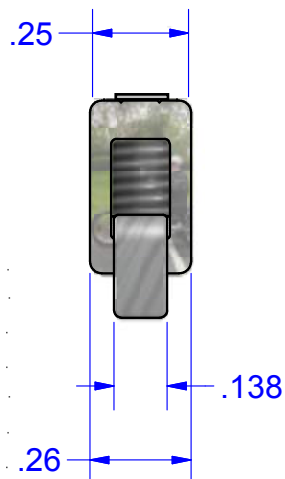



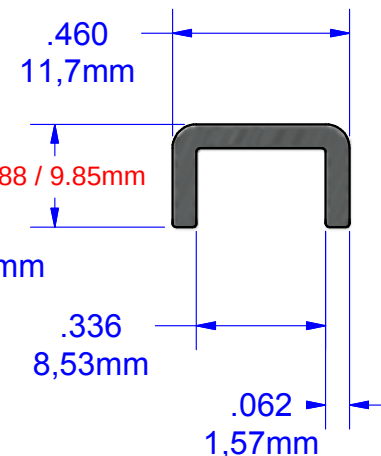

PCB THICKNESS 0.10\" (2.5mm) TO 0.20\" (5.0mm)
SEE B12-PCB-HEX FOR SHORTER LEGS

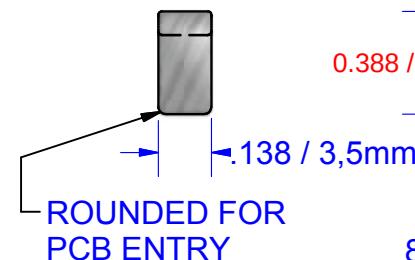

SCALE=X2




MAY HAVE VARIED ID
INDENT MARKS ON TOP

30AMP WIRE RANGE 10-14
SOLID AND STRANDED



B12-NM

10-32 UNF - 2A



PARTS MARKED

IHI
B12
cURus
CU7

NOTES

- FERRULES ARE RECOMMENDED FOR FINE AND STRANDED SMALL WIRES. FOR FLEX WIRE RATINGS WITH FERRULES SEE: ihiconnectors.com/Technical-Data-Installation.htm#FERRULE
- WAVE SOLDERABLE (THT)
- FOR .10 PCB MIN. BOARD THICKNESS.
- ALL FINAL PCB SPECS BASED ON BUYER TESTING AND APPROVAL

COPYRIGHT (PER LATEST REVISION DATE) OF INTERNATIONAL HYDRAULICS, INC. (IHI®). ALL RIGHTS RESERVED. THIS COMPLETE ENGINEERING DRAWING, SCHEMATICS, AND DESIGN ARE PROPRIETARY AND CONFIDENTIAL PROPERTY OF INTERNATIONAL HYDRAULICS, INC. DBA: IHI CONNECTORS® IN CLEVELAND, OHIO, AND MAY NOT BE DUPLICATED, USED FOR THE BASIS OF DESIGN OR MANUFACTURE WITHOUT PRIOR WRITTEN PERMISSION OF ITS OWNER. Contents contain a combination of registered trademark, copyright, or patent protections exclusively owned by IHI® which are not to be infringed upon.

Not for use where failure creates a hazard to human health or safety. All products are subject to this full disclaimer: ihiconnectors.com/disclaimer.html

FOR FURTHER INFORMATION ON THE PROPER USE OF THIS PRODUCT IN SPECIFIC APPLICATIONS SEE ihiconnectors.com/b12.htm

NOT TO SCALE !

THIS DRAWING AND DESIGN ARE THE PROPERTY OF INTERNATIONAL HYDRAULICS, INC., CLEVELAND, OHIO, AND MAY NOT BE DUPLICATED, USED FOR THE BASIS OF DESIGN OR MANUFACTURE WITHOUT THE WRITTEN PERMISSION OF INTERNATIONAL HYDRAULICS, INC., CLEVELAND, OHIO.

GENERAL TOLERANCES
±.015 (±0,038)

MATERIAL: (6006/6105)
XB12

FINISH: TIN PLATE
EMS

INTERNATIONAL HYDRAULICS, INC.

TITLE:

B12-PCB24-HEX
30AMP PCB CONNECTOR (THT)

SIZE:

X2

DRAWN BY:

TDS

DWG NO.:

B12-PCB24-HEX

REV:

DATE:

05/15/2025

IHI CONNECTORS