




SEE ALSO IHI GUIDE TO
SMT COMPONENTS BEFORE
USING SMT COMPONENTS IN DESIGNS




SCREW #12786SS
STAINLESS STEEL
INSERTED TO BOTTOM
OF WIRE HOLE

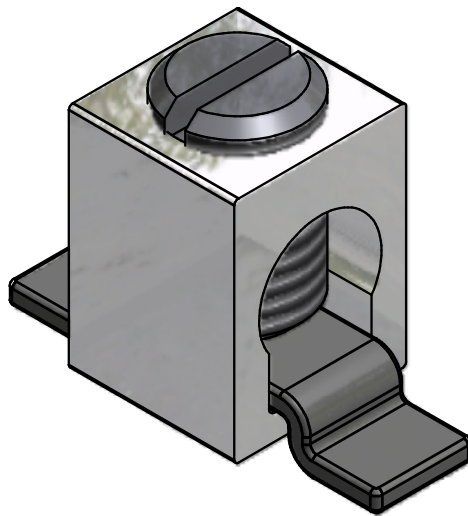



PARTS MARKED

- B2
- IHI LOGO
- CSA LOGO
- UL REGOGNITION LOGO
- 2-14CU7
- 2-8AL7



5/16-24 UNF - 2B

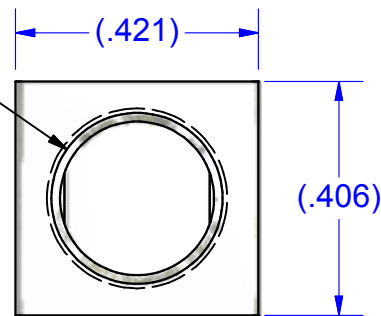

CONNECTOR #B2A
ALUMINUM (TIN PLATED)

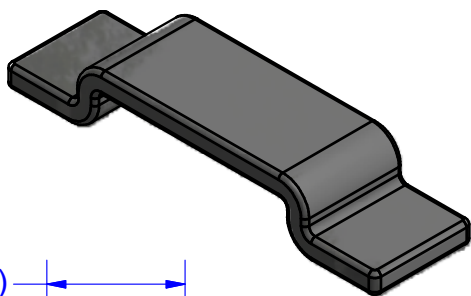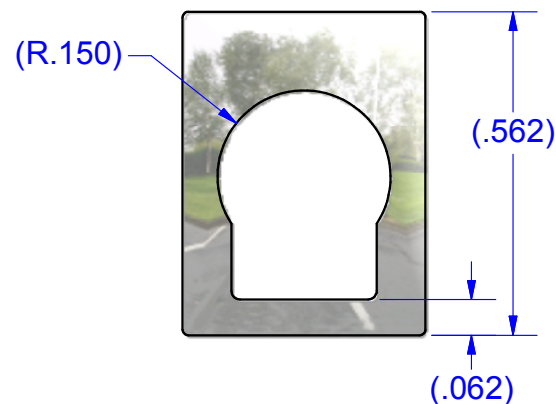

BUSS #14257-SMT
COPPER (TIN SOLDERABLE)

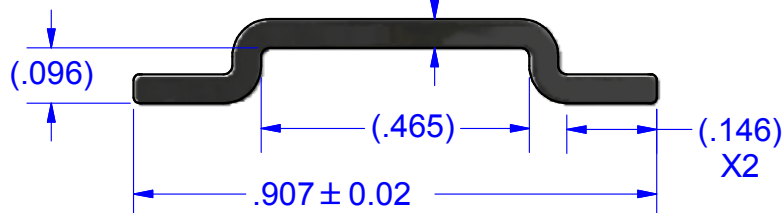

NOT FOR USE WHERE FAILURE CREATES A HAZARD TO HUMAN HEALTH OR SAFETY. ALL PRODUCTS ARE SUBJECT TO THIS FULL DISCLAIMER:
<http://www.ihiconnectors.com/disclaimer.html>

FOR FURTHER INFORMATION ON THE PROPER USE OF THIS PRODUCT IN SPECIFIC APPLICATIONS SEE
<http://www.ihiconnectors.com/GuideToFlexFlexibleFineStrandedWireCableMechanicalLugsFAQ.html>
<http://ihiconnectors.com/Precautions-when-using-SMT.pdf>
http://www.ihiconnectors.com/FAQ_SMT_SMD_High_CurrentPCB_Terminal_LugsSolderCreep.htm
http://www.ihiconnectors.com/High_Amp_Wide_Trace_PCB_Wire_Connection.html
<http://www.ihiconnectors.com/Technical-Data-Installation.htm>

THIS DRAWING AND DESIGN ARE THE PROPERTY OF INTERNATIONAL HYDRAULICS, INC., CLEVELAND, OHIO, AND MAY NOT BE DUPLICATED, USED FOR THE BASIS OF DESIGN OR MANUFACTURE WITHOUT THE WRITTEN PERMISSION OF INTERNATIONAL HYDRAULICS, INC., CLEVELAND, OHIO.

INTERNATIONAL HYDRAULICS, INC.

TITLE:
Connector + Buss for PCB Mount
ASSEMBLED CONNECTOR

GENERAL TOLERANCES
±.015 (±0,038mm)

MATERIAL:
SEE ABOVE

SIZE: DRAWN BY: DWG NO.: REV:
TDS **B2A-PCB-SMT-SS** **1**
(SALES)

FINISH: DATE: 1215/08
11/19/14

THIS IS A CAD DRAWING, DO NOT MANUALLY REVISE