









EXTRUSION CAVITY ID MARKS
WHEN USED FOLLOW THIS TYPICAL
PATTERN ON THE TOP OF THE PART

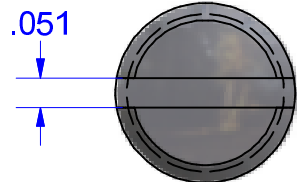


SCREW # 12786/15718/15720
STEEL (ZINC PLATED)

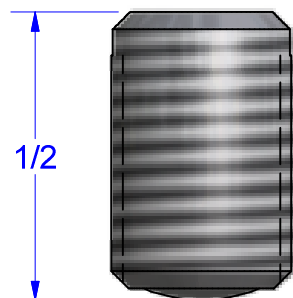


PARTS MARKED
B2
IHI LOGO
CSA LOGO
UL REGOGNITION LOGO
2-14CU7
2-8AL7

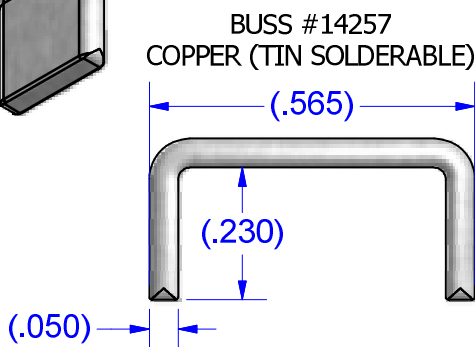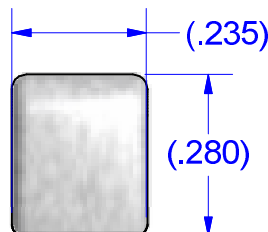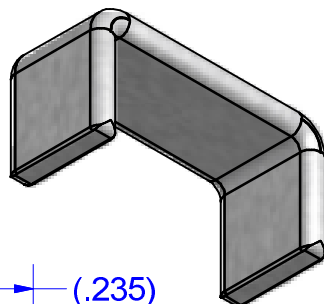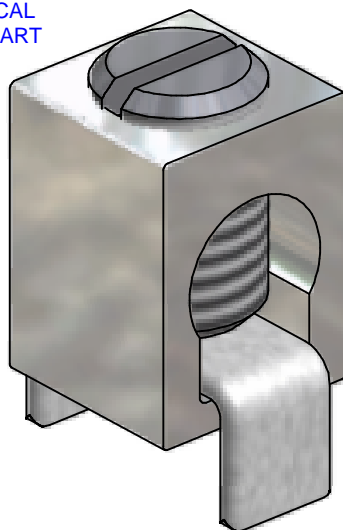

BUSS #14257
COPPER (TIN SOLDERABLE)

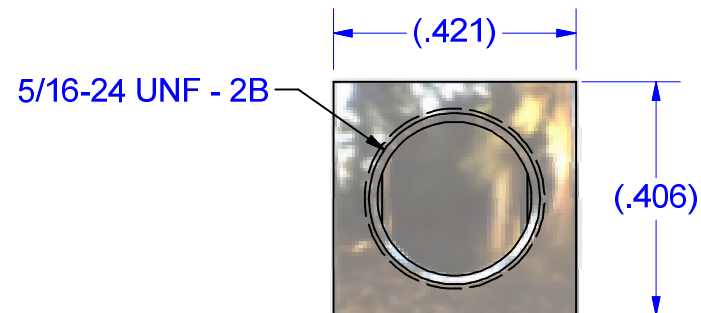

CONNECTOR #B2A
ALUMINUM (TIN PLATED)

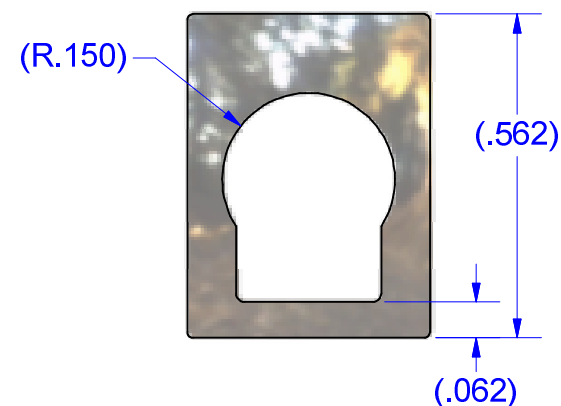

CONDITIONS OF ACCEPTABILITY
ARE NOMINALLY PROVIDED BY
THE TURN PREVENT STAPLES
OF MINIMUM REQUIRED CROSS
SECTION IN CONJUNCTION WITH
ADEQUATE PCB STRUCTURE.

NOT FOR USE WHERE FAILURE CREATES A HAZARD TO HUMAN HEALTH OR SAFETY. ALL PRODUCTS ARE
SUBJECT TO THIS FULL DISCLAIMER: <http://www.ihiconnectors.com/disclaimer.html>

FOR FURTHER INFORMATION ON THE PROPER USE OF THIS PRODUCT IN SPECIFIC APPLICATIONS SEE
http://www.ihiconnectors.com/High_Amp_Wide_Trace_PCB_Wire_Connection.html
<http://www.ihiconnectors.com/Technical-Data-Installation.htm>
<https://lugsdirect.com/PDF Documents/5-16-SLOTTEDSCREW-BIT-RECOMMENDED-SPECS-IHICONNECTORS.pdf>

THIS DRAWING AND DESIGN ARE THE PROPERTY OF
INTERNATIONAL HYDRAULICS, INC., CLEVELAND,
OHIO, AND MAY NOT BE DUPLICATED, USED FOR
THE BASIS OF DESIGN OR MANUFACTURE WITHOUT
THE WRITTEN PERMISSION OF INTERNATIONAL
HYDRAULICS, INC., CLEVELAND, OHIO.

GENERAL TOLERANCES
±.015 (±0.038mm)

MATERIAL:
SEE ABOVE

FINISH:

INTERNATIONAL HYDRAULICS, INC.

TITLE:

Connector + Buss for PCB Mount
ASSEMBLED CONNECTOR

| | | | |
|-------|-------------------------|------------------------------------|------|
| SIZE: | DRAWN BY: TDS | DWG NO.: B2A-PCB (SALES) | REV: |
|-------|-------------------------|------------------------------------|------|

DATE:
1215/08

THIS IS A CAD DRAWING, DO
NOT MANUALLY REVISE